VITL

COMMERCIAL SURFACES

COMMERCIAL CATALOG | Edition 1

ARTE | Gray 12x24

ARTE

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR

Gray | VTL AEGR



Gray | 2x2
VTL AEGR MOS22R

Gray | 9x10 Hex
VTL AEGR HEXAG

Light Brown | VTL AELB



Light Brown | 2x2
VTL AELB MOS22R

Light Brown | 9x1
VTL AELB HEXAG

White | VTL AEWH



White | 2x2
VTL AEWH MOS22R

White | 9x10 Hex
VTL AEWH HEXA

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- V1 Uniform Appearance
- DCOF ≥0.42
- VOC Free | Green Squared

PERFORMANCE CHAR

Breaking Strength	≥25
Chemical Resistance	Res
DCOF	≥ 0.
Deep Scratch Resistance	N/
Frost Resistance	Res
Mohs Hardness	N/
Water Absorption	≤ 0.
Certifications	VO

CASCADE | Beige 12x24

CASCADE

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR

White | VTL CCWH



White | 2x2
VTL CCWH MOS22



White | 1x4 Herringb
VTL CCWH HERRING

Beige | VTL CCBE



Beige | 2x2
VTL CCBE MOS22



Beige | 1x4 Herringb
VTL CCBE HERRING



Taupe | VTL CCTA



Taupe | 2x2
VTL CCTA MOS22



Taupe | 1x4 Herringb
VTL CCTA HERRING



Black | VTL CCBL



Black | 2x2
VTL CCBL MOS22



Black | 1x4 Herringb
VTL CCBL HERRING

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- V2 Slight Variation
- DCOF ≥0.42

PERFORMANCE CHAR

- Breaking Strength
- Chemical Resistance
- DCOF
- Deep Scratch Resistance
- Frost Resistance
- Mohs Hardness
- Water Absorption
- Certifications

EVERETT | Light Gray 12x24

EVERETT

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR

White | VTL EVWH

White | 2x2
VTL EVWH MOS22

Beig

Light Gray | VTL EVLG



Light Gray | 2x2
VTL EVLG MOS22

Dark

TECHNICAL INFORMATION

- Made in USA
- Stock | Import
- V2 Slight Variation
- DCOF ≥0.42
- HPD | LEED

PERFORMANCE CHAR

- Breaking Strength
- Chemical Resistance
- DCOF
- Deep Scratch Resistance
- Frost Resistance
- Mohs Hardness
- Water Absorption
- Certifications

FAIRBANKS

INTERIOR AND EXTERIOR FLOOR & WALL | PORCELA

White | VTL FRWH

Beige | VTL FRBG

White | 2x2
VTL FRWH MOS22



White | Brick
VTL FRWH BRICK



Beige | 2x2
VTL FRBG MOS22

Beige |
VTL FRE



Brown | VTL FRBW



Dark Gray | VTL FRDG



Brown | 2x2
VTL FRBW MOS22



Brown | Brick
VTL FRBW BRICK



Dark Gray | 2x2
VTL FRDG MOS22

Dark Gra
VTL FRI

FAIRBANKS | Brown 24x24 and Tallulah Snow 16x32 Whittle

TECHNICAL INFORMATION

Made in Italy
Stock | Import
V2 Slight Variation | V3 Moderate Variation
DCOF ≥0.42
ISO 9001 | ISO 14001 | ISO 45001

PERFORMANCE

Breaking Strength
Chemical Resistance
DCOF
Deep Scratch Resistan
Frost Resistance
Mohs Hardness
Water Absorption
Certifications

GALWAY | Floor

FLOOR & WALL | GLAZED COLOR-BODY PORCELAIN | CONCRETE LOOK

Oyster | VTL GWOY

Oyster | 2x2
VTL GWOY MOS22

Oyster | Geometric
VTL GWOY GEOMETRIC


Lace | VTL GWLA

Lace | 2x2
VTL GWLA MOS22

Lave | Geometric
VTL GWLA GEOMETRIC

Lace & Olive | Hex
VTL GWLX HEX

Brick | VTL GWBC

Brick | 2x2
VTL GWBC MOS22

Brick | Geometric
VTL GWBC GEOMETRIC

Ecru | VTL GWEC

Ecru | 2x2
VTL GWEC MOS22

Ecru | Geometric
VTL GWEC GEOMETRIC

Ecru | Hex
VTL GWEX HEX

Mink | VTL GWMI

Mink | 2x2
VTL GWMI MOS22

Mink | Geometric
VTL GWMI GEOMETRIC

Stone | VTL GWST

Stone | 2x2
VTL GWST MOS22

Stone | Geometric
VTL GWST GEOMETRIC

Stone | Hex
VTL GWSX HEX

Dove | VTL GWDO

Dove | 2x2
VTL GWDO MOS22

Dove | Geometric
VTL GWDO GEOMETRIC


Dark Grey | VTL GWDG

Dark Grey | 2x2
VTL GWDG MOS22

Dark Grey | Geometric
VTL GWDG GEOMETRIC


Dark Grey & Yellow | Hex
VTL GWGY HEX


Dark Grey & Black | Hex
VTL GWGB HEX

Caviar | VTL GWCA

Caviar | 2x2
VTL GWCA MOS22

Caviar | Geometric
VTL GWCA GEOMETRIC

Black | VTL GWBK

Black | 2x2
VTL GWBK MOS22

Black | Geometric
VTL GWBK GEOMETRIC


Black & Turquoise | Hex
VTL GWBT HEX

Black | Hex
VTL GWBX HEX

TECHNICAL INFORMATION

Made in Italy
Stock | Import
V2 Slight Variation
DCOF ≥0.42
LEED, EPD, PEF, FDES, HPE, UPEC

PERFORMANCE CHAR

Breaking Strength	≥150
Chemical Resistance	N/A
DCOF	> 0.4
Deep Scratch Resistance	≤150
Frost Resistance	Resi
Mohs Hardness	N/A
Water Absorption	≤0.1%
Certifications	LEE

GALWAY | Wall

WALL | GLAZED CERAMIC & GLAZED COLOR-BODY PORCELAIN | CONCRETE LOOK

Lace | VTL GWLA SCULPTR

Lace Mix | Minibrick
VTL GWLX MINIBRICK

Oyster | VTL GWOY SCULPTR

Oyster | Minibrick
VTL GWOY MINIBRICK

Palm Deco A | VTL GWPA 47110AR

Palm Deco B | VTL GWPA 47110BR

Brick | VTL GWBC SCULPTR

Brick Mix | Minibrick
VTL GWBM MINIBRICK

Mink | VTL GWMI SCULPTR

Mink | Minibrick
VTL GWMI MINIBRICK

Dove | VTL GWDO SCULPTR

Dove | Minibrick
VTL GWDO MINIBRICK

Blue | VTL GWBL SCULPTR

Blue Mix | Minibrick
VTL GWBL MINIBRICK

Curry | VTL GWCU 1632R

Curry Mix | Minibrick
VTL GWCX MINIBRICK

Blue | VTL GWBL 1632R

Dark Grey | Minibrick
VTL GWDG MINIBRICK

Pine | VTL GWPI 1632R

Pine | Minibrick
VTL GWPI MINIBRICK

Scarlet | VTL GWSC 1632R

Scarlet | Minibrick
VTL GWSC MINIBRICK

Ecru Mix | Minibrick
VTL GWEX MINIBRICK

TECHNICAL INFORMATION

Made in Italy
Stock | Import
V2 Slight Variation
LEED, EPD, PEF, FDES, HPE, UPEC

PERFORMANCE CHAR

Breaking Strength	≥600
Chemical Resistance	A
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	10%
Certifications	LEE

KARLSTAD | Blue Gravel 24x24 | Blue Solid 24x47 | Blue Pebble 24x47 | White Stone 24x47

KARLSTAD

INTERIOR AND EXTERIOR FLOOR & WALL | PORCELA

White Solid | VTL KSWH 1224SR

White Gravel | VTL KSWH 1224GR

White Pe

Light Gray Solid | VTL KSLG 1224SR


Light Gray Gravel | VTL KSLG 1224GR

Light Gra

Gray Solid | VTL KSGR 1224SR


Gray Gravel | VTL KSGR 1224GR

Gray Peb

Blue Solid | VTL KSBL 1224SR


Blue Gravel | VTL KSBL 1224GR

Blue Peb


Green Solid | VTL KSGE 1224SR


Green Gravel | VTL KSGE 1224GR

Green Pe


Pink Solid | VTL KSPI 1224SR


Pink Gravel | VTL KSPI 1224GR

Pink Peb

TECHNICAL INFORMATION

- Made in Italy
- Import
- V3 Moderate Variation
- DCOF ≥0.42
- Mindful Materials | Greengard | QB UPEC

PERFORMANC

- Thickness
- Breaking Strength
- Chemical Resistance
- DCOF
- Deep Scratch Resista
- Frost Resistance
- Mohs Hardness
- Water Absorption
- Certifications

LOTUS

FLOOR & WALL | EXTERIOR WALL | PORCELAIN | MARBLE LOOK

White | VTL LTWH

White | Hexagon
VTL LTWH ESAGONOH

White | 4x4 Brass
VTL LTWH MOS44

White | 1x1
VTL LTWH MOS11


Ivory | VTL LTIV

Ivory | Hexagon
VTL LTIV ESAGONOH

Ivory | 4x4 Brass
VTL LTIV MOS44

Ivory | 1x1
VTL LTIV MOS11

Pink | VTL LTPN

Pink | Hexagon
VTL LTPN ESAGONOH

Pink | 4x4 Brass
VTL LTPN MOS44

Pink | 1x1
VTL LTPN MOS11

Gold | VTL LTGL

Gold | Hexagon
VTL LTGL ESAGONOH

Gold | 4x4 Brass
VTL LTGL MOS44

Gold | 1x1
VTL LTGL MOS11

Silver | VTL LTSL

Silver | Hexagon
VTL LTSL ESAGONOH

Silver | 4x4 Brass
VTL LTSL MOS44

Silver | 1x1
VTL LTSL MOS11


Gray | VTL LTGR

Gray | Hexagon
VTL LTGR ESAGONOH

Gray | 4x4 Brass
VTL LTGR MOS44

Gray | 1x1
VTL LTGR MOS11


Black | VTL LTBL

Black | Hexagon
VTL LTBL ESAGONOH

Black | 4x4 Brass
VTL LTBL MOS44

Black | 1x1
VTL LTBL MOS11

LOTUS | White 48x48

TECHNICAL INFORMATION

- Made in Italy
- Import
- V2 Slight | V3 Moderate Variation
- DCOF ≥0.42
- ISO 9001 | ISO 14001 | ISO 45001

PERFORMANCE CHAR

- Breaking Strength
- Chemical Resistance
- DCOF
- Deep Scratch Resistance
- Frost Resistance
- Mohs Hardness
- Water Absorption
- Certifications ISO

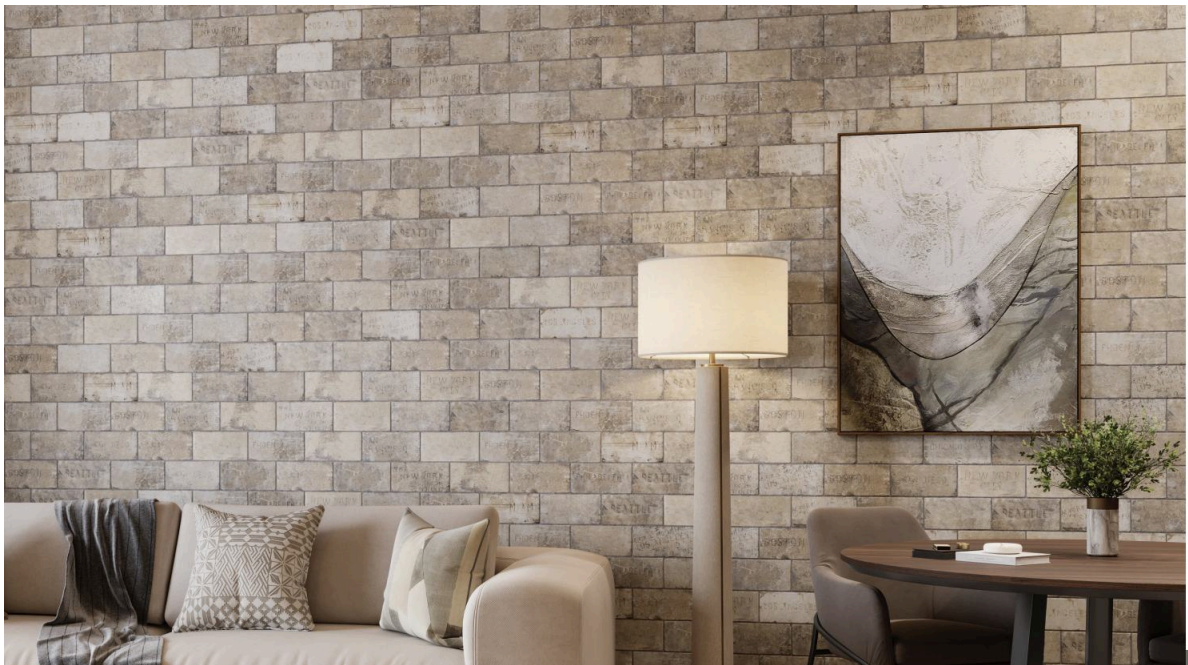

MIDWAY

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR

White | 4x8
VTL MWWH 48

White | 4x8 Urban Mix
VTL MWWH URBAMIX48

Red | 4x8
VTL MWRE 48

Red | 4x8 Urban Mix
VTL MWRE URBAMIX48


Brown | 4x8
VTL MWBR 48

Brown | 4x8 Urban Mix
VTL MWBR URBAMIX48

Taupe | 4x8
VTL MWTA 48

Taupe | 4x8 Urban Mix
VTL MWTA URBAMIX48


MIDWAY | White 4x8 Urban Mix

TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V4 Substantial Variation
- DCOF ≥0.60

PERFORMANCE CHAR

- Breaking Strength
- Chemical Resistance
- DCOF
- Deep Scratch Resistance
- Frost Resistance
- Mohs Hardness
- Water Absorption
- Certifications

MIDTOWN | Sage 3x12

MIDTOWN

FLOOR & WALL | EXTERIOR WALL | UNGLAZED THROUGH-BODY PORCELAIN | SOLID LOOK

Cream | VTL MICR

Blush | VTL MIBL

Dove | VTL MIDO

Sky | VTL MISK

Steel | VTL MIST

Sage | VTL MISA

Anthracite | VTL MIAN

Clay | VTL MICL

SIZE	FINISH
3" x 12" x 8mm	Matte

TECHNICAL INFORMATION

- Made in Portugal
- Import
- V3 Moderate Variation

PERFORMANCE CHARACTERISTICS	
Breaking Strength	≥ 30Nmm2
Chemical Resistance	A-HA
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	7
Water Absorption	≤ 0.5%
Certifications	Greenguard

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Government	Hospitality
Multi-Family	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

MINKE

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | WOOD LOOK

Grey | VTL MKGR

White | VTL MKWH

Sand | VTL MKSA

Tan | VTL MKTA

Brown | VTL MKBR

Black | VTL MKBL

Grey | Bacchette
VTL MKGR BACCHETTE

White | Bacchette
VTL MKWH BACCHETTE

Sand | Bacchette
VTL MKSA BACCHETTE

Tan | Bacchette
VTL MKTA BACCHETTE

Brown | Bacchette
VTL MKBR BACCHETTE

Black | Bacchette
VTL MKBL BACCHETTE

Grey | Intarsio
VTL MKGR 2424IR

White | Intarsio
VTL MKWH 2424IR

Sand | Intarsio
VTL MKSA 2424IR

Tan | Intarsio
VTL MKTA 2424IR

Brown | Intarsio
VTL MKBR 2424IR

Black | Intarsio
VTL MKBL 2424IR

Grey | Intarsio Textured
VTL MKGR 2424IT

White | Intarsio Textured
VTL MKWH 2424IT

Sand | Intarsio Textured
VTL MKSA 2424IT

Tan | Intarsio Textured
VTL MKTA 2424IT

Brown | Intarsio Textured
VTL MKBR 2424IT

Black | Intarsio Textured
VTL MKBL 2424IT

Grey | Intreccio
VTL MKGR
INTRECCIO

Grey | Losanga
VTL MKGR
LOSANGA

White | Intreccio
VTL MKWH
INTRECCIO

White | Losanga
VTL MKWH
LOSANGA

Sand | Intreccio
VTL MKSA
INTRECCIO

Sand | Losanga
VTL MKSA
LOSANGA

Tan | Intreccio
VTL MKTA
INTRECCIO

Tan | Losanga
VTL MKTA
LOSANGA

Brown | Intreccio
VTL MKBR
INTRECCIO

Brown | Losanga
VTL MKBR
LOSANGA

Black | Intreccio
VTL MKBL
INTRECCIO

Black | Losanga
VTL MKBL
LOSANGA

MINKE | Brown Intarsio Deco 24x24 Matte and Textured and White 12x24

SIZE	FINISH
48" x 48" x 10mm Slab Rectified	Matte
24" x 48" x 10mm Rectified	Matte
24" x 24" x 10mm Rectified	Matte
12" x 48" x 10mm Rectified	Matte
12" x 24" x 10mm Rectified	Matte
9" x 11" x 10mm Hexagon	Matte

MOSAICS & TRIM	FINISH
48" x 48" Intarsio Deco Slab Rectified	Matte
24" x 24" Intarsio Deco. Rectified	Matte
24" x 24" Intarsio Deco. Textured Rectified	Matte
12" x 24" Intarsio Deco. Textured Rectified	Matte
12" x 24" Bacchette Mosaic	Matte
12" x 12" Intreccio Mosaic	Matte
12" x 12" Losanga Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
12" x 48" Costa Retta Rectified	Matte

TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V1 Uniform Appearance
- DCOF ≥0.42

PERFORMANCE CHARACTERISTICS	
Breaking Strength	≥1300N
Chemical Resistance	A-LA-HA
DCOF	>0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤0.1%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Healthcare	Multi-Family
Residential	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

MOOD

WALL | GLAZED CERAMIC | ZELLIGE LOOK

White | 5x5
VTL MOWH 55

White | 3x5
VTL MOWH 255

White | 4x6 Diamond
VTL MOWH DIAMOND

Mink | 5x5
VTL MOMK 55

Mink | 3x5
VTL MOMK 255

Mink | 4x6 Diamond
VTL MOMK DIAMOND

Rose | 5x5
VTL MORO 55

Rose | 3x5
VTL MORO 255

Rose | 4x6 Diamond
VTL MORO DIAMOND

Turquoise | 5x5
VTL MOTU 55

Turquoise | 3x5
VTL MOTU 255

Turquoise | 4x6 Diamond
VTL MOTU DIAMOND


Wine | 5x5
VTL MOWI 55

Wine | 3x5
VTL MOWI 255

Wine | 4x6 Diamond
VTL MOWI DIAMOND

Denim | 5x5
VTL MODE 55

Denim | 3x5
VTL MODE 255

Denim | 4x6 Diamond
VTL MODE DIAMOND

Avocado | 5x5
VTL MOAV 55

Avocado | 3x5
VTL MOAV 255

Avocado | 4x6 Diamond
VTL MOAV DIAMOND

Cobalt | 5x5
VTL MOCO 55

Cobalt | 3x5
VTL MOCO 255

Cobalt | 4x6 Diamond
VTL MOCO DIAMOND


Midnight | 5x5
VTL MOMI 55

Midnight | 3x5
VTL MOMI 255

Midnight | 4x6 Diamond
VTL MOMI DIAMOND


MOOD | White 4x6 Diamond

SIZE	FINISH
5" x 5" x 9mm	Gloss
4" x 6" x 9mm Diamond	Gloss
3" x 5" x 9mm	Gloss

TECHNICAL INFORMATION

- Made in Portugal
- Import
- V4 Substantial Variation

PERFORMANCE CHARACTERISTICS	
Breaking Strength	≥ 13 N/mm2
Chemical Resistance	A-LA
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	0.15
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Hospitality
Multi-Family	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

NORRIS | White 24x48

NORRIS

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | TRAVERTINE LOOK



White | VTL NOWH
White | 3x8 Brick
VTL NOWH BRICK
White | 2x2
VTL NOWH MOS22
Beige | VTL NOBE
Beige | 3x8 Brick
VTL NOBE BRICK
Beige | 2x2
VTL NOBE MOS22
Gray | VTL NOGR
Gray | 3x8 Brick
VTL NOGR BRICK
Gray | 2x2
VTL NOGR MOS22
Black | VTL NOBL
Black | 3x8 Brick
VTL NOBL BRICK
Black | 2x2
VTL NOBL MOS22

SIZE	FINISH
24" x 47" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
3" x 8" Brick Mosaic	Matte
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Covebase Rectified	Matte

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- V2 Slight Variation
- DCOF ≥0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Multi-Family	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

OPTIX | Floor & Wall

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | CONCRETE LOOK



White | VTL OIWH
White | 2x2
VTL OIWH MOS22
White | Angle
VTL OIWH MOSANGL
Dawn | VTL OIDA
Dawn | 2x2
VTL OIDA MOS22
Dawn | Angle
VTL OIDA MOSANGL
Wafer | VTL OIWA
Wafer | 2x2
VTL OIWA MOS22
Wafer | Angle
VTL OIWA MOSANGL
Gray | VTL OIGY
Gray | 2x2
VTL OIGY MOS22
Gray | Angle
VTL OIGY MOSANGL
Olive | VTL OIOL
Olive | 2x2
VTL OIOL MOS22
Olive | Angle
VTL OIOL MOSANGL
Black | VTL OIBL
Black | 2x2
VTL OIBL MOS22
Black | Angle
VTL OIBL MOSANGL

Ocean | 47x110 Rectified (3 Patterns)
VTL OIOC 47110XL

Forest | 47x110 Rectified (2 Patterns)
VTL OIFO 47110XL

OPTIX | Black 24x24, White 24x47, Forest 47x110 and Teal Arrow Mosaic

SIZE	FINISH
24" x 47" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
24" x 24"x 9mm	Silk
12" x 24" x 9mm Rectified	Matte | Silk
47" x 110" x 6mm Pattern Rectified	Matte

MOSAICS & TRIM	FINISH
12" x 14" Angle Mosaic	Matte | Silk
2" x 2" Mosaic	Matte
3" x 24" Bullnose	Matte | Silk
13" x 47" Scalino	Matte | Silk
13" x 47" Elemento L Grip	Bush-Hammered
13" x 24" Scalino	Matte | Silk
12" x 24" Gradino	Matte | Silk
13" x 13" Scalino Angolare	Matte | Silk
3" x 12" Bullnose Left & Right Sagomato	Silk
3" x 12" Sagomato Left & Right	Matte
1" x 47" Corner	Matte



TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V2 Slight Variation
- DCOF ≥0.42
- LEED, EPD, PEF, FDES, HPE, UPEC

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥1500 N
Chemical Resistance	A
DCOF	>0.42
Deep Scratch Resistance	≤ 150mm3
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤0.1%
Certifications	LEED, EPD, PEF, FDES, HPE, UPEC

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Healthcare	Hospitality
Restaurant	Senior Living

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

OPTIX | Wall

WALL | GLAZED CERAMIC | CONCRETE LOOK



Black | VTL OIBL 2047R
Black | 5/8x5/8
VTL OIBL MOSMINI
Black | Arrow
VTL OIBL MOSARROW
Dawn | VTL OIDA 2047R
Dawn | 5/8x5/8
VTL OIDA MOSMINI
Dawn | Arrow
VTL OIDA MOSARROW
Olive | VTL OIOL 2047R
Olive | 5/8x5/8
VTL OIOL MOSMINI
Olive | Arrow
VTL OIOL MOSARROW
Wafer | VTL OIWA 2047R
Wafer | 5/8x5/8
VTL OIWA MOSMINI
Wafer | Arrow
VTL OIWA MOSARROW
Brown | VTL OIBR 2047R
Brown | 5/8x5/8
VTL OIBR MOSMINI
Brown | Arrow
VTL OIBR MOSARROW
White | VTL OIWH 2047R
White | 5/8x5/8
VTL OIWH MOSMINI
White | Arrow
VTL OIWH MOSARROW
White | Illusion
VTL OIWH ILLUSION
Red | VTL OIRE 2047R
Red | 5/8x5/8
VTL OIRE MOSMINI
Red | Arrow
VTL OIRE MOSARROW
Pink | VTL OIPI 2047R
Pink | 5/8x5/8
VTL OIPI MOSMINI
Pink | Arrow
VTL OIPI MOSARROW
Pink | Illusion
VTL OIPI ILLUSION
Green | VTL OIGR 2047R
Green | 5/8x5/8
VTL OIGR MOSMINI
Green | Arrow
VTL OIGR MOSARROW
Teal | VTL OITE 2047R
Teal | 5/8x5/8
VTL OITE MOSMINI
Teal | Arrow
VTL OITE MOSARROW
Teal | Illusion
VTL OITE ILLUSION
Blue | VTL OIBU 2047R
Blue | 5/8x5/8
VTL OIBU MOSMINI
Blue | Arrow
VTL OIBU MOSARROW
Juniper | VTL OIJU 2047R
Juniper | 5/8x5/8
VTL OIJU MOSMINI
Juniper | Arrow
VTL OIJU MOSARROW
Juniper | Illusion
VTL OIJU ILLUSION
Ocean | VTL OIOC 2047R
Forest | VTL OIFO 2047R
Circles | VTL OICI 2047R
Rose Gold | VTL OIRG 2047R

OPTIX | Forest 47x110 and Teal Arrow Mosaic

SIZE	FINISH
20" x 47" x 8.5mm Rectified Wall	Matte

MOSAICS & TRIM	FINISH
12" x 13" Illusion Mosaic	Matte
12" x 12" Arrow Mosaic	Matte
0.625" x 0.625" Mosaic Mini	Matte
1" x 20" Corner	Matte
0.375" x 0.375" Corner A.E.	Matte



TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V2 Slight Variation
- EPD, PEF, FDES, HPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥1500 N
Chemical Resistance	A
DCOF	>0.42
Deep Scratch Resistance	≤ 150mm3
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤0.1%
Certifications	EPD, PEF, FDES, HPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Healthcare	Hospitality
Restaurant	Senior Living

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

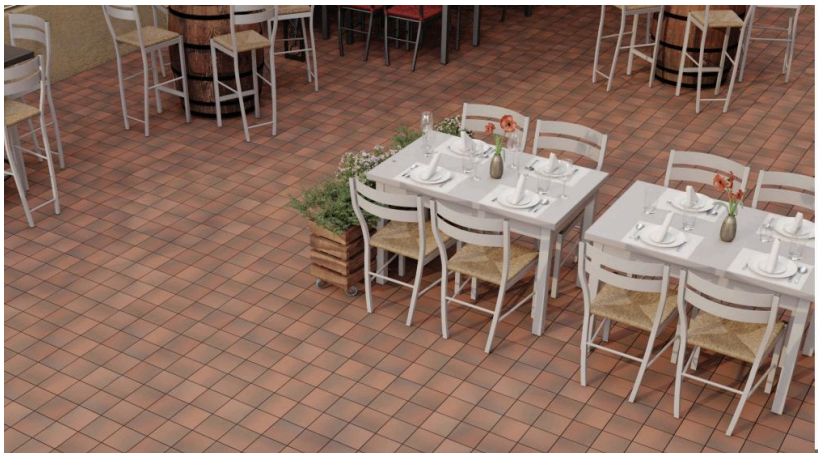

PARKETTE

INTERIOR AND EXTERIOR FLOOR & WALL | QUARRY | TERRACOTTA LOOK



Stone | VTL PAST
Gray | VTL PAGR
Silver Flash | VTL PASV
Smoke | VTL PASM
Smoke Tread | VTL PASM
Ash Flash | VTL PAAS
Burnt | VTL PABU
Red | VTL PARD
Chestnut | VTL PACH
Chestnut Tread | VTL PACH
Sienna Flash | VTL PASI
Autumn | VTL PAAU
Mahogany | VTL PAMA

SIZE	FINISH
8" x 8" x 12.7mm	Matte
8" x 8" x 12.7mm Abrasive	Matte
6" x 6" x 12.7mm	Matte
6" x 6" x 12.7mm Abrasive	Matte
6" x 6" x 12.7mm Tread	Matte

MOSAICS & TRIM	FINISH
8" x 8" Bullnose	Matte
8" x 8" Bullnose Out Corner	Matte
6" x 6" Bullnose	Matte
6" x 6" Bullnose Abrasive	Matte
6" x 6" Bullnose Corner	Matte
6" x 6" Bullnose Out Corner	Matte
6" x 6" Cove Base	Matte
5" x 8" Cove Base	Matte
5" x 6" Cove Base Out Corner	Matte
5" x 6" Round Top Cove Base	Matte
5" x 6" Round Top Cove Base Corner Right	Matte
5" x 6" Round Top Cove Base Corner Left	Matte
1" x 6" Cove Base Incorner	Matte
1" x 6" Cove Base Outcorner	Matte
1" x 5" Cove Base Inside Corner	Matte

PARKETTE | Sienna Flash 6x6

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- V3 Moderate Variation
- V4 Substantial Variation
- Matte | DCOF ≥0.42 - ≥0.60
  Abrasive & Tread | DCOF ≥0.65

PERFORMANCE CHARACTERISTICS

Breaking Strength
Chemical Resistance
DCOF
Deep Scratch Resistance
Frost Resistance
Mohs Hardness
Water Absorption
Certifications

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial		
Heavy Commercial		
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education
Hospitality	Restaurant

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

---

5 | RESTAURANT
4 | GALLERY
3 | CONFERENCE ROOM
2 | TRAINING ROOM
1 | RECEPTION

PURITY | Elegance 48x48 and Royal 48x110

PURITY

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | MARBLE LOOK

Elegance | VTL PTEL

Elegance | 2x2
VTL PTEL MOS22

Elegance | Hex
VTL PTEL HEX

Sublime | VTL PTSB

Sublime | 2x2
VTL PTSB MOS22

Sublime | Hex
VTL PTSB HEX

Grandeur | VTL PTGR

Grandeur | 2x2
VTL PTGR MOS22

Grandeur | Hex
VTL PTGR HEX


Refinement | VTL PTRF

Refinement | 2x2
VTL PTRF MOS22

Refinement | Hex
VTL PTRF HEX


Royal | VTL PTRY

Royal | 2x2
VTL PTRY MOS22

Royal | Hex
VTL PTRY HEX

Majesty | VTL PTMJ

Majesty | 2x2
VTL PTMJ MOS22

Majesty | Hex
VTL PTMJ HEX

SIZE	FINISH
48" x 110" x 6mm Rectified	Matte | Polished
48" x 110" x 6mm Bookmatch A Rectified	Polished
48" x 110" x 6mm Bookmatch B Rectified	Polished
48" x 48" x 10mm Rectified	Matte | Polished
32" x 96" x 12mm Pre-Fab 12mm Slab	Matte
24" x 48" x 8mm Rectified	Polished
12" x 24" x 10mm Rectified	Matte | Polished
3" x 12"x 10mm	Polished

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte | Polished
2" x 2" Hexagon Mosaic	Matte | Polished
3" x 12" Bullnose	Matte | Polished

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- DCOF ≥0.42

PERFORMANCE CHARACTERISTICS

Thickness	8mm | 10mm | 12mm	6mm
Breaking Strength	≥300 lbf	≥250 lbf
Chemical Resistance	Resistant	Resistant
DCOF	≥0.42	≥0.42
Deep Scratch Resistance	N/A	N/A
Frost Resistance	Resistant	Resistant
Mohs Hardness	N/A	N/A
Water Absorption	≤ 0.4%	≤ 0.4%
Certifications	N/A	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Government	Multi-Family
Residential	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

REMINGTON | Light Gray 24x47 and 24x47 Metal 3D Deco, and Opal 2x9

REMINGTON

INTERIOR AND EXTERIOR FLOOR & WALL | PORCELAIN | METAL LOOK

White | VTL RMWH

White Metal 3D | VTL RMWH MRID

White | 2x2
VTL RMWH MOS22

Light Gray | VTL RMLG

Light Gray Metal 3D | VTL RMLG MRID

Light Gray | 2x2
VTL RMLG MOS22

Dark Gray | VTL RMDG

Dark Gray Metal 3D | VTL RMDG MRID

Dark Gray | 2x2
VTL RMDG MOS22

Black | VTL RMBK

Black Metal 3D | VTL RMBK MRID

Black | 2x2
VTL RMBK MOS22

SIZE	FINISH
47" x 109" x 6.5mm Slab Rectified	Matte
24" x 47" x 9.5mm Rectified	Matte
12" x 24" x 9.5mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
24" x 47" Metal 3D Deco Rectified	Matte
12" x 24" Metal 3D Deco Rectified	Matte
3" x 24" Bullnose Rectified	Matte
13" x 47" Step Rectified	Matte
13" x 47" Stair Tread Rectified	Matte
13" x 47" Left Corner Rectified	Matte
13" x 47" Right Corner Rectified	Matte

TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V3 Moderate Variation
- DCOF ≥0.42
- Greenguard

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 2000 N
Chemical Resistance	A-LA-HA
DCOF	≥0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	Greenguard

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	•

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Government
Multi-Family	Residential

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

REMINGTON | Dark Gray 47x109 and Emerald 2x9

REMINGTON | Brick

FLOOR & WALL | EXTERIOR WALL | PORCELAIN | METAL LOOK

Opal | VTL RMOP

Moonstone | VTL RMMO

Sapphire | VTL RMSA

Emerald | VTL RMEM

Onyx | VTL RMON

SIZE	FINISH
2" x 9" Glossy	Gloss

MOSAICS & TRIM	FINISH
2" x 9" Bullnose Glossy	Gloss

TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V3 Moderate Variation
- Greenguard

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 2000 N
Chemical Resistance	A-LA-HA
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	Greenguard

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Government
Multi-Family	Residential

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

REN | Taupe 32x32 and 6" Hex Mosaic

REN

FLOOR & WALL | GLAZED COLOR-BODY PORCELAIN | SLATE LOOK


Light Grey | VTL RNLG
Light Grey | 6" Hex
VTL RNLG MOS6HEX
Light Grey | 2" Hex
VTL RNLG MOS2HEX
Light Grey | 2x2
VTL RNLG MOS22
Taupe | VTL RNTA
Taupe | 6" Hex
VTL RNTA MOS6HEX
Taupe | 2" Hex
VTL RNTA MOS2HEX
Taupe | 2x2
VTL RNTA MOS22
Medium Grey | VTL RNMG
Medium Grey | 6" Hex
VTL RNMG MOS6HEX
Medium Grey | 2" Hex
VTL RNMG MOS2HEX
Medium Grey | 2x2
VTL RNMG MOS22
Dark Grey | VTL RNDG
Dark Grey | 6" Hex
VTL RNDG MOS6HEX
Dark Grey | 2" Hex
VTL RNDG MOS2HEX
Dark Grey | 2x2
VTL RNDG MOS22

SIZE	FINISH
24" x 47" x 10.3mm Rectified	Matte
32" x 32" x 11.5mm Rectified	Matte
12" x 24" x 8.4mm Rectified	Matte

MOSAICS & TRIM	FINISH
6" x 6" Hex Mosaics	Matte
2" x 2" Mosiacs	Matte
2" x 2" Hex Mosaics	Matte
3" x 24" Bullnose	Matte

TECHNICAL INFORMATION

- Made in Turkey
- Stock | Ready Ship
- V2 Slight Variation
- DCOF ≥0.42
- EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	>1750
Chemical Resistance	N/A
DCOF	>0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	9
Water Absorption	N/A
Certifications	EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Automotive	Corporate
Government	Healthcare

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

SCENIC | Charcoal 12x24

SCENIC

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | LIMESTONE LOOK


White | VTL SBWH
White | 2x2
VTL SBWH MOS22
Beige | VTL SBBE
Beige | 2x2
VTL SBBE MOS22
Grey | VTL SBGR
Grey | 2x2
VTL SBGR MOS22
Charcoal | VTL SBCH
Charcoal | 2x2
VTL SBCH MOS22

SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte
6" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Covebase Rectified	Matte

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- V2 Slight Variation
- DCOF ≥0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education
Government	Healthcare

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

SLASH | Dark Brown 8x48 Arch and Natural 8x48 3D Plank

SLASH

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | WOOD LOOK


Natural | VTL SHNT
Natural Score | VTL SHNT SCORE
Beige | VTL SHBG
Beige Score | VTL SHBG SCORE
Medium Brown | VTL SHMB
Medium Brown Score | VTL SHMB SCORE
Dark Brown | VTL SHDB
Dark Brown Score | VTL SHDB SCORE
Taupe | VTL SHTP
Taupe Score | VTL SHTP SCORE
Natural Arch | VTL SHNT ARCH
Natural Plank 3D | VTL SHNT 3DPLANK
Beige Arch | VTL SHBG ARCH
Beige Plank 3D | VTL SHBG 3DPLANK
Medium Brown Arch | VTL SHMB ARCH
Medium Brown Plank 3D | VTL SHMB 3DPLANK
Dark Brown Arch | VTL SHDB ARCH
Dark Brown Plank 3D | VTL SHDB 3DPLANK
Taupe Arch | VTL SHTP ARCH
Taupe Plank 3D | VTL SHTP 3DPLANK
Natural Chevron | VTL SHNT CHEV848R
Beige Chevron | VTL SHBG CHEV848R
Beige Chevron | VTL SHBG CHEV318
Medium Brown Chevron | VTL SHMB CHEV848R
Medium Brown Chevron | VTL SHMB CHEV318
Dark Brown Chevron | VTL SHDB CHEV848R
Taupe Chevron | VTL SHTP CHEV848R
Taupe Chevron | VTL SHTP CHEV318

SIZE	FINISH
12" x 48" x 20mm Textured Rectified	Bush-Hammered
24" x 24" x 20mm Textured Rectified	Bush-Hammered
8" x 48" x 9mm Rectified	Matte
8" x 48" x 9mm Arch Rectified	Matte
8" x 48" x 9mm Chevron Rectified	Matte
8" x 48" x 9mm Grip Rectified	Bush-Hammered
3" x 18" x 9mm Chevron	Matte

MOSAICS & TRIM	FINISH
12" x 48" Plank Decorative Rectified	Matte
8" x 48" Score Decorative Rectified	Matte
8" x 48" Plank 3D Decorative Rectified	Matte
3" x 24" Bullnose	Matte

TECHNICAL INFORMATION

- Made in Italy
- Stock | Import
- V2 Slight Variation
- DCOF ≥0.42

PERFORMANCE CHARACTERISTICS

Finish	Bush-Hammered	Matte
Breaking Strength	> 10000 N	≥ 1300N
Chemical Resistance	Resistant	Resistant
DCOF	> 0.55	> 0.42
Deep Scratch Resistance	N/A	N/A
Frost Resistance	Resistant	Resistant
Mohs Hardness	N/A	N/A
Water Absorption	≤ 0.1%	≤ 0.1%
Certifications	N/A	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Hospitality	Multi-Family	Residential
Restaurant	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

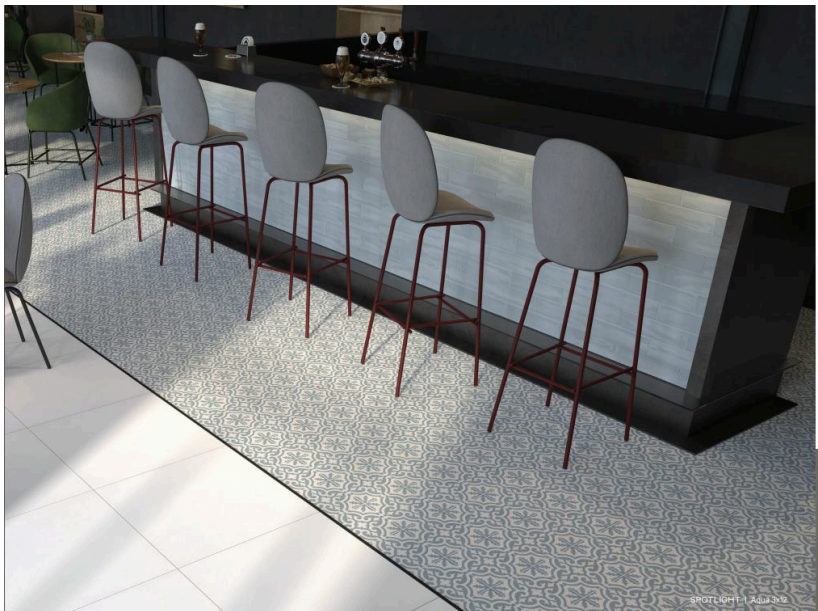
SPOTLIGHT | Aqua 3x12

SPOTLIGHT | Gloss

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | CONCRETE LOOK


Snow | VTL SGSN
Sand | VTL SNSA
TAN | VTL SNTA
Sky | VTL SNSK
Mist | VTL SNMI
Smoke | VTL SNSM
Fog | VTL SNFO
Pebble | VTL SNPE
Twilight | VTL SNTW
Rain | VTL SNRA
Storm | VTL SNST
Caviar | VTL SNCA

SIZE	FINISH
6" x 24" x 8mm Glossy	Gloss
3" x 12" x 8mm Glossy	Gloss

MOSAICS & TRIM	FINISH
6" x 24" Bullnose Glossy	Gloss

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- DCOF ≥0.42
- Burreau Veritas | Greenguard LEED | Green Squared

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥400 lb/ft2
Chemical Resistance	Resistant
DCOF	≥0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤0.4%
Certifications	Burreau Veritas | Greenguard LEED | Green Squared

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

STUDIO | Sky 2x6

STUDIO

WALL | GLAZED CERAMIC | SOLID LOOK

White | VTL SDWH

Seashell | VTL SDSE



Fog | VTL SDFO



French Gray | VTL SDFG

Mint | VTL SDMI

Dove Gray | VTL SDDG

Sky | VTL SDSK

Concrete | VTL SDCO

Anthracite | VTL SDAN

SIZE	FINISH
8" x 24" x 9mm	Gloss
8" x 16" x 8mm	Gloss
6" x 6" x 7mm	Gloss
4" x 16" x 8mm	Gloss | Matte
4" x 12" x 8mm	Gloss
4" x 12" x 9mm Beveled	Gloss
3" x 6" x 7mm	Gloss | Matte
3" x 6" x 7mm Beveled	Gloss
2" x 12" x 9mm	Gloss | Matte

MOSAICS & TRIM	FINISH
2" x 8" Bullnose	Gloss | Matte
2" x 6" Bullnose	Gloss | Matte
1/3" x 12" Quarter Round	Gloss | Matte

TECHNICAL INFORMATION

- Made in Turkey
- Stock | Ready Ship
- V1 Uniform Appearance

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 230 lbf
Chemical Resistance	Class B
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	Not Resistant
Mohs Hardness	2
Water Absorption	10-18%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Hospitality	Multi-Family
Restaurant	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

STUDIO | Mosaics

FLOOR & WALL | EXTERIOR WALL | GLAZED & UNGLAZED PORCELAIN | SOLID LOOK

White | 2x6 Brick
VTL SDWH BRICK26G/M

Seashell | 2x6 Brick
VTL SDSE BRICK26G/M

Fog | 2x6 Brick
VTL SDFO BRICK26G/M

French Gray | 2x6 Brick
VTL SDFG BRICK26G/M

Dove Gray | 2x6 Brick
VTL SDDG BRICK26G/M

Concrete | 2x6 Brick
VTL SDCO BRICK26G/M

Anthracite | 2x6 Brick
VTL SDAN BRICK26G/M

Sky | 2x6 Brick
VTL SDSK BRICK26G/M

Mint | 2x6 Brick
VTL SDMI BRICK26G/M

White | Herringbone
VTL SDWH HERRINGG/M

Seashell | Herringbone
VTL SDSE HERRINGG/M

Fog | Herringbone
VTL SDFO HERRINGG/M

French Gray | Herringbone
VTL SDFG HERRINGG/M

Dove Gray | Herringbone
VTL SDDG HERRINGG/M

Concrete | Herringbone
VTL SDCO HERRINGG/M

Anthracite | Herringbone
VTL SDAN HERRINGG/M

Sky | Herringbone
VTL SDSK HERRINGG/M

Mint | Herringbone
VTL SDMI HERRINGG/M

White | 2" Hexagon
VTL SDWH HEX2M

Seashell | 2" Hexagon
VTL SDSE HEX2M/UGL

Fog | 2" Hexagon
VTL SDFO HEX2M/UGL

French Gray | 2" Hexagon
VTL SDFG HEX2M/UGL

Dove Gray | 2" Hexagon
VTL SDDG HEX2M

Concrete | 2" Hexagon
VTL SDCO HEX2M

Anthracite | 2" Hexagon
VTL SDAN HEX2M/UGL

Sky | 2" Hexagon
VTL SDSK HEX2M

Mint | 2" Hexagon
VTL SDMI HEX2M

White | Penny Round
VTL SDWH PENNY34M

Seashell | Penny Round
VTL SDSE PENNY34M

Fog | Penny Round
VTL SDFO PENNY34M

French Gray | Penny Round
VTL SDFG PENNY34M

Dove Gray | Penny Round
VTL SDDG PENNY34M

Concrete | Penny Round
VTL SDCO PENNY34M

Anthracite | Penny Round
VTL SDAN PENNY34M

Sky | Penny Round
VTL SDSK PENNY34M

Mint | Penny Round
VTL SDMI PENNY34M

White | 2x2
VTL SDWH MOS22M

Seashell | 2x2
VTL SDSE MOS22M/UGL

Fog | 2x2
VTL SDFO MOS22M/UGL

French Gray | 2x2
VTL SDFG MOS22M/UGL

Dove Gray | 2x2
VTL SDDG MOS22M

Concrete | 2x2
VTL SDCO MOS22M

Anthracite | 2x2
VTL SDAN MOS22M/UGL

White | 1" Hexagon
VTL SDWH HEXAGON1M

Seashell | 1" Hexagon
VTL SDSE HEXAGON1M

Fog | 1" Hexagon
VTL SDFO HEXAGON1M

French Gray | 1" Hexagon
VTL SDFG HEXAGON1M

Dove Gray | 1" Hexagon
VTL SDDG HEXAGON1M

Concrete | 1" Hexagon
VTL SDCO HEXAGON1M

Anthracite | 1" Hexagon
VTL SDAN HEXAGON1M



STUDIO | White Penny Round and Sky 4x12

SIZE	FINISH
2" x 6" Brick Mosaic	Gloss | Matte
8" x 16" Herringbone Mosaic	Gloss | Matte
2" x 2" Mosaic	Matte
2" x 2" Hexagon Mosaic	Matte
1" x 1" Hexagon Mosaic	Matte
Penny Round Mosaic	Gloss | Matte

TECHNICAL INFORMATION

- Stock | Ready Ship
- V1 Uniform Appearance
- DCOF <0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	>275 lbf
Chemical Resistance	Class A
DCOF	<0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	5
Water Absorption	<0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Hospitality	Multi-Family
Restaurant	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

STUDIO | Mosaics

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | SOLID LOOK

White | Picket
VTL SDWH PICKETG/M

Seashell | Picket
VTL SDSE PICKETG/M

Fog | Picket
VTL SDFO PICKETG/M

French Gray | Picket
VTL SDFG PICKETG/M

Dove Gray | Picket
VTL SDDG PICKETG/M

Concrete | Picket
VTL SDCO PICKETG/M

Anthracite | Picket
VTL SDAN PICKETG/M

White | Arabesque
VTL SDWH ARABESG

Seashell | Arabesque
VTL SDSE ARABESG

Fog | Arabesque
VTL SDFO ARABESG

French Gray | Arabesque
VTL SDFG ARABESG

Dove Gray | Arabesque
VTL SDDG ARABESG

Mint | Arabesque
VTL SDMI ARABESG

Sky | Arabesque
VTL SDSK ARABESG

White | Scallop
VTL SDWH SCALLOPG

Seashell | Scallop
VTL SDSE SCALLOPG

Fog | Scallop
VTL SDFO SCALLOPG

French Gray | Scallop
VTL SDFG SCALLOPG

Dove Gray | Scallop
VTL SDDG SCALLOPG

Mint | Scallop
VTL SDMI SCALLOPG

Sky | Scallop
VTL SDSK SCALLOPG

Dove Gray | Basketweave
VTL SDDG BASKDOTM

Mint | Basketweave
VTL SDMI BASKDOTM

Sky | Basketweave
VTL SDSK BASKDOTM

Concrete | Basketweave
VTL SDCO BASKDOTM

Anthracite | Basketweave
VTL SDAN BASKDOTM

Dove Gray | 1" Hex with Insert
VTL SDDG HEX1DOTM

Mint | 1" Hex with Insert
VTL SDMI HEX1DOTM

Sky | 1" Hex with Insert
VTL SDSK HEX1DOTM

Concrete | 1" Hex with Insert
VTL SDCO HEX1DOTM

Anthracite | 1" Hex with Insert
VTL SDAN HEX1DOTM

STUDIO | White Picket

SIZE	FINISH
2" x 5" Picket Mosaic	Gloss | Matte
10" x 13" Beveled Arabesque Mosaic	Gloss
11" x 13" Scallop Mosaic	Gloss
1" x 1" Hexagon with Insert Mosaic	Matte
Basketweave Mosaic	Matte

TECHNICAL INFORMATION

- Stock | Ready Ship
- V1 Uniform Appearance
- DCOF <0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	>275 lbf
Chemical Resistance	Class A
DCOF	<0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	5
Water Absorption	<0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Hospitality	Multi-Family
Restaurant	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

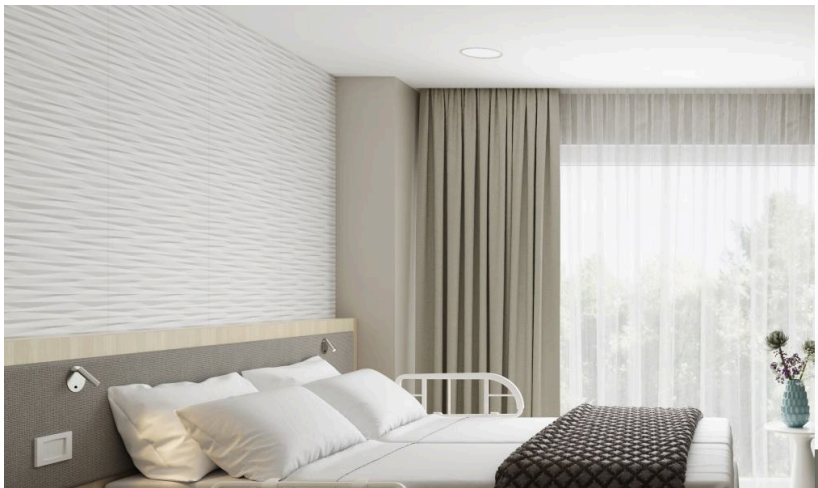

TALLULAH

WALL | GLAZED CERAMIC | SOLID LOOK

Snow | VTL TASN 1632



Oyster Matte | VTL TAOY 1632M

Snow Whittle | VTL TASN WHITTLEM

Snow Coastline | VTL TASN COASTLINM

Oyster Coastline | VTL TAOY COASTLINM

Snow Facet | VTL TASN FACETM

Snow Weave | VTL TASN WEAVEM

Snow Crystal | VTL TASN CRYSTALM

Snow Sash | VTL TASN SASHM



Snow Matte | VTL TASN 1222M

Snow Tide | VTL TASN TIDE1222M

Snow Trail | VTL TASN TRAILM

SIZE	FINISH
16" x 32" x 8.5mm	Gloss | Matte
16" x 32" x 10mm Coastline Deco	Matte
16" x 32" x 10mm Crystal Decorative	Matte
16" x 32" x 10mm Facet Decorative	Matte
16" x 32" x 10mm Sash Decorative	Matte
16" x 32" x 10mm Weave Decorative	Matte
16" x 32" x 10mm Whittle Decorative	Matte
12" x 22" x 9.5mm	Matte
12" x 22" x 9.5mm Tide Decorative	Matte
12" x 22" x 9.5mm Trail Decorative	Matte

MOSAICS & TRIM	FINISH
3/8" x 8" Edge	Matte

TECHNICAL INFORMATION

PERFORMANCE CHARACTERISTICS

TILE APPLICATION

COMMON SEGMENTS

TALLULAH | Snow 16x32 Whittle

- Made in Italy
- Stock | Import
- V1 Uniform Appearance
- LEED | PEF

Breaking Strength	≥600 N
Chemical Resistance	A
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	10%<EV≤20%
Certifications	LEED | PEF

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

Healthcare	Education	Multi-Family
Residential	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

THIS OR THAT | Green Hex and Ivory 6x6

THIS OR THAT

WALL | GLAZED CERAMIC | DIMENSIONAL



- White | 4x5 Hexagon VTL TTWH HEX44
- White | 6x6 VTL TTWH 66
- Ivory | 4x5 Hexagon VTL TTIV HEX44
- Ivory | 6x6 VTL TTIV 66
- Green | 4x5 Hexagon VTL TTGR HEX44
- Green | 6x6 VTL TTGR 66
- Red | 4x5 Hexagon VTL TTRD HEX44
- Red | 6x6 VTL TTRD 66
- Blue | 4x5 Hexagon VTL TTBL HEX44
- Blue | 6x6 VTL TTBL 66

SIZE	FINISH
6" x 6" x 7.75mm Five unique patterns that are pre-boxed in a random assortment.	Matte
4" x 5" x 7.75 Hexagon Four unique patterns that are pre-boxed in a random assortment.	Matte

MOSAICS & TRIM	FINISH
1" x 12" Jolly	Matte

TECHNICAL INFORMATION

- Made in USA
- Ready Ship
- V1 Uniform Appearance

PERFORMANCE CHARACTERISTICS	
Breaking Strength	120-230lbs
Chemical Resistance	Resistant
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	< 20%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Hospitality	Multi-Family
Residential	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

VIVID

WALL | GLAZED CERAMIC | SOLID LOOK

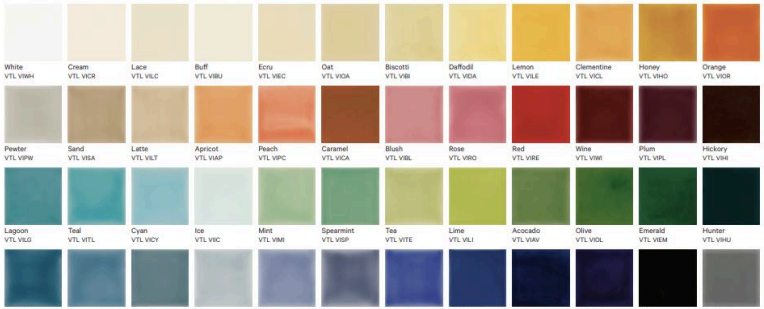

White VTL VIWH	Cream VTL VICR	Lace VTL VILC	Buff VTL VIBU	Ecru VTL VIEC	Oat VTL VIOA	Biscotti VTL VIBI	Daffodil VTL VIDA	Lemon VTL VILE	Clementine VTL VICL	Honey VTL VIHO	Orange VTL VIOR
Pewter VTL VIPW	Sand VTL VISA	Latte VTL VILT	Apricot VTL VIAP	Peach VTL VIPC	Caramel VTL VICA	Blush VTL VIBL	Rose VTL VIRO	Red VTL VIRE	Wine VTL VIWI	Plum VTL VIPL	Hickory VTL VIHI
Lagoon VTL VILG	Teal VTL VITL	Cyan VTL VICY	Ice VTL VIIC	Mint VTL VIMI	Spearmint VTL VISP	Tea VTL VITE	Lime VTL VILI	Acocado VTL VIAV	Olive VTL VIOL	Emerald VTL VIEM	Hunter VTL VIHU
Peacock VTL VIPE	Stream VTL VIST	Steel Blue VTL VISB	Dove VTL VIDO	Iris VTL VIIR	Storm VTL VISM	Lavender VTL VILA	Violet VTL VIVI	Navy VTL VINA	Midnight VTL VIMD	Black VTL VIBK	Seal VTL VISE



White VTL VIWH 44DECO	Ice VTL VIIC 44DECO	Dove VTL VIDO 44DECO	Steel Blue VTL VISB 44DECO	Olive VTL VIOL 44DECO	Honey VTL VIHO 44DECO	Black VTL VIBK 44DECO



VIVID | Steel Blue 4x4 Decorative and Tea 4x4

SIZE	FINISH
6" x 6" x 9mm	Gloss
4" x 4" x 9mm	Gloss
4" x 4" x 9mm Decorative	Gloss
3" x 6" x 9mm	Gloss

MOSAICS & TRIM	FINISH
1" x 6" Surface Bullnose	Gloss
1" x 6" Concave & Convex Quarter Round	Gloss
1" x 6" Semi Round Bullnose	Gloss
1" x 4" Surface Bullnose	Gloss
1" x 4" Concave & Convex Quarter Round	Gloss
1" x 4" Semi Round Bullnose	Gloss
1"x 1" Concave & Convex Quarter Round	Gloss

TECHNICAL INFORMATION

- Made in Portugal
- Import
- V2 Slight Variation

PERFORMANCE CHARACTERISTICS	
Breaking Strength	≥ 13 N/mm2
Chemical Resistance	A-LA
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	0.15
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Education	Hospitality	Multi-Family
Restaurant	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

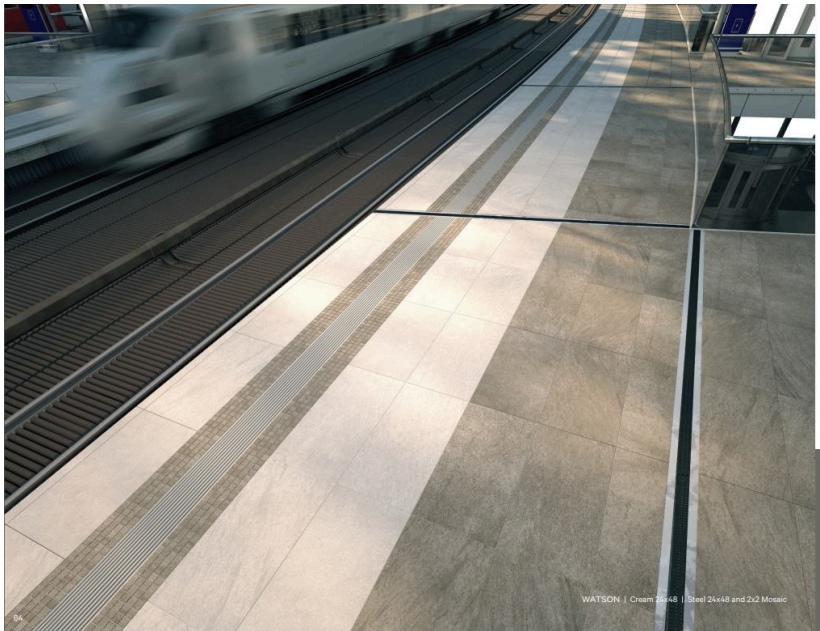

WATSON | Cream 24x48 | Steel 24x48 and 2x2 Mosaic

WATSON

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | LIMESTONE LOOK



- Cream | VTL WTCR
- Cream | 2x2 VTL WTCR MOS22
- Beige | VTL WTBE
- Beige | 2x2 VTL WTBE MOS22
- Silver | VTL WTSI
- Silver | 2x2 VTL WTSI MOS22
- Bronze | VTL WTBZ
- Bronze | 2x2 VTL WTBZ MOS22
- Steel | VTL WTST
- Steel | 2x2 VTL WTST MOS22

SIZE	FINISH
24" x 48" x 8mm Rectified	Matte
24" x 24" x 8mm Rectified	Matte
12" x 24" x 8mm Rectified	Matte
12" x 12" x 8mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic Rectified	Matte
3" x 12" Bullnose Rectified	Matte
6" x 12" Cove Base Rectified	Matte

TECHNICAL INFORMATION

- Made in USA
- Stock | Ready Ship
- V2 Slight Variation
- DCOF ≥0.42
- Greenguard | Bureau Veritas | NSF EPD

PERFORMANCE CHARACTERISTICS	
Breaking Strength	≥400 lb/ft2
Chemical Resistance	Resistant
DCOF	≥0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	≥ 7
Water Absorption	≤0.4%
Certifications	Greenguard | Bureau Veritas | NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Government
Healthcare	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.